

Aion

Downlight Series





FEATURES

Mechanical

Body: Aluminium
 Finish: Electrostatic powder painted
 Installation: Ceiling recessed
 Diffuser: Transparent safety glass
 Optics: Aluminium reflector

Options

RAL selection
 CRI>90
 CRI>97
 DALI
 0-10V / 1-10V
 Casambi
 Emergency kit / CBS connection
 GST connector

Electrical

Driver: LED driver with external connection
 Light source: COB LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 Pfd>0.90
 Operating Temperature: -20 / +50


Optical

Beam angle: 60 degrees
 UGR: <21
 CRI>80
 McAdams Step<3

Specifications




Photometric Data



CCT Values



Technical Drawing



Art. No.	Watt	Lumen	CCT	Dimensions (QxH)mm.	Cut-out (mm.)	Weight (kg.)
IDS-513-008-830	8W	800	3000K	108x55	85	0,6 kg.
IDS-513-008-840	8W	920	4000K	108x55	85	0,6 kg.
IDS-513-008-865	8W	985	6500K	108x55	85	0,6 kg.



FEATURES

Mechanical

Body: Aluminium
 Finish: Electrostatic powder painted
 Installation: Ceiling recessed
 Diffuser: Transparent safety glass
 Optics: Aluminium reflector

Electrical

Driver: LED driver with external connection
 Light source: COB LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 P_f>0.90
 Operating Temperature: -20 / +50


Options

RAL selection
 CRI>90
 CRI>97
 DALI
 0-10V / 1-10V
 Casambi
 Emergency kit / CBS connection
 GST connector

Optical


Beam angle: 60 degrees
 UGR: <21
 CRI>80
 McAdams Step<3

Specifications



Photometric Data


60°



CCT Values



Technical Drawing



Art. No.	Watt	Lumen	CCT	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
IDS-514-012-830	12W	1220	3000K	128x55	105	0,9 kg.
IDS-514-012-840	12W	1300	4000K	128x55	105	0,9 kg.
IDS-514-012-865	12W	1450	6500K	128x55	105	0,9 kg.



FEATURES

Mechanical

Body: Aluminium
 Finish: Electrostatic powder painted
 Installation: Ceiling recessed
 Diffuser: Transparent safety glass
 Optics: Aluminium reflector

Options

RAL selection
 CRI>90
 CRI>97
 DALI
 0-10V / 1-10V
 Casambi
 Emergency kit / CBS connection
 GST connector

Electrical

Driver: LED driver with external connection
 Light source: COB LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 Pfc>0.90
 Operating Temperature: -20 / +50


Optical

BBeam angle: 60 degrees
 UGR: <21
 CRI>80
 McAdams Step<3

Specifications




Photometric Data



CCT Values



Technical Drawing



Art. No.	Watt	Lumen	CCT	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
IDS-515-020-830	20W	2020	3000K	150x55	130	1,2 kg.
IDS-515-020-840	20W	2100	4000K	150x55	130	1,2 kg.
IDS-515-020-865	20W	2250	6500K	150x55	130	1,2 kg.



FEATURES

Mechanical

Body: Aluminium
 Finish: Electrostatic powder painted
 Installation: Ceiling recessed
 Diffuser: Transparent safety glass
 Optics: Aluminium reflector

Electrical

Driver: LED driver with external connection
 Light source: COB LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 P_f>0.90
 Operating Temperature: -20 / +50

Options

RAL selection
 CRI>90
 CRI>97
 DALI
 0-10V / 1-10V
 Casambi
 Emergency kit / CBS connection
 GST connector


Optical

Beam angle: 60 degrees
 UGR: <21
 CRI>80
 McAdams Step<3

Specifications




Photometric Data



CCT Values




Technical Drawing



Art. No.	Watt	Lumen	CCT	Dimensions (QxH)mm.	Cut-out (mm.)	Weight (kg.)
IDS-516-025-830	25W	2620	3000K	200x55	175	1,6 kg.
IDS-516-025-840	25W	2700	4000K	200x55	175	1,6 kg.
IDS-516-025-865	25W	2890	6500K	200x55	175	1,6 kg.



Specifications



FEATURES

Mechanical

Body: Aluminium
 Finish: Electrostatic powder painted
 Installation: ceiling recessed
 Diffuser: Transparent safety glass
 oPTiCS: Alimunyum reflector

Electrical

Driver: LED driver with external connection
 Light source: COB LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 Pfc: 0.90
 Operating Temperature: -20 / +50

Options


RAL selection
 CRI>90
 CRI>97
 DALI
 0-10V / 1-10V
 Casambi
 Emergency kit / CBS connection
 GST connector

Optical

Beam angle: 60 degrees
 UGR: <21
 CRI>80
 McAdams Step<3

Photometric Data


60°



CCT Values



Technical Drawing



Art. No.	Watt	Lumen	CCT	Dimensions (QxH)mm.	Cut-out (mm.)	Weight (kg.)
IDS-517-030-830	30W	3100	3000K	240x55	210	2,0 kg.
IDS-517-030-840	30W	3320	4000K	240x55	210	2,0 kg.
IDS-517-030-865	30W	3500	6500K	240x55	210	2,0 kg.


Atlas

Downlight Series





Specifications



Photometric Data

CCT Values



FEATURES

Mechanical

Body: Aluminium
 Finish: Electrostatic powder painted
 Installation: Ceiling recessed
 Diffuser: Opal plexiglass diffuser

Electrical

Driver: LED driver with external connection
 Light source: SMD LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 P_f>0.90
 Operating Temperature: -20 / +50


Options

RAL selection
 CRI>90
 Microprismatic diffuser - UGR<19
 DALI
 0-10V / 1-10V
 Casambi
 Emergency kit / CBS connection
 GST connector

Optical

Beam angle: 120 degrees
 UGR: <21
 CRI>80
 McAdams Step<3

Technical Drawing



Art. No.	Watt	Lumen	CCT	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
IDS-501-008-830	8W	810	3000K	108x55	85	0,6 kg.
IDS-501-008-840	8W	840	4000K	108x55	85	0,6 kg.
IDS-501-008-865	8W	900	6500K	108x55	85	0,6 kg.



FEATURES

Mechanical

Body: Aluminium
 Finish: Electrostatic powder painted
 Installation: Ceiling recessed
 Diffuser: Opal plexiglass diffuser

Electrical

Driver: LED driver with external connection
 Light source: SMD LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 P_f > 0.90
 Operating Temperature: -20 / +50


Options

RRAL selection
 CRI > 90
 Microprismatic diffuser - UGR < 19
 DALI
 0-10V / 1-10V
 Casambi
 Emergency kit / CBS connection
 GST connector

Optical

Beam angle: 120 degrees
 UGR: < 21
 CRI > 80
 McAdams Step < 3

Specifications




Photometric Data

CCT Values



Technical Drawing



Art. No.	Watt	Lumen	CCT	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
IDS-502-012-830	12W	1150	3000K	128x55	105	0,9 kg.
IDS-502-012-840	12W	1200	4000K	128x55	105	0,9 kg.
IDS-502-012-865	12W	1280	6500K	128x55	105	0,9 kg.



FEATURES

Mechanical

Body: Aluminium
 Finish: Electrostatic powder painted
 Installation: Ceiling recessed
 Diffuser: Opal plexiglass diffuser

Electrical

Driver: LED driver with external connection
 Light source: SMD LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 Pf>0.90
 Operating Temperature: -20 / +50


Options

RAL selection
 CRI>90
 Microprismatic diffuser - UGR<19
 DALI
 0-10V / 1-10V
 Casambi
 Emergency kit / CBS connection
 GST connector

Optical

Beam angle: 120 degrees
 UGR: <21
 CRI>80
 McAdams Step<3

Specifications




Photometric Data

CCT Values



Technical Drawing



Art. No.	Watt	Lumen	CCT	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
IDS-503-015-830	15W	1500	3000K	150x55	130	1,2 kg.
IDS-503-015-840	15W	1620	4000K	150x55	130	1,2 kg.
IDS-503-015-865	15W	1690	6500K	150x55	130	1,2 kg.



FEATURES

Mechanical

Body: Aluminium
 Finish: Electrostatic powder painted
 Installation: Ceiling recessed
 Diffuser: Opal plexiglass diffuser

Electrical

Driver: LED driver with external connection
 Light source: SMD LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 Pfc: 0.90
 Operating Temperature: -20 / +50


Options

RAL selection
 CRI>90
 Microprismatic diffuser - UGR<19
 DALI
 0-10V / 1-10V
 Casambi
 Emergency kit / CBS connection
 GST connector

Optical


Beam angle: 120 degrees
 UGR: <21
 CRI>80
 McAdams Step<3

Specifications




Photometric Data

CCT Values



Technical Drawing



Art. No.	Watt	Lumen	CCT	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
IDS-504-020-830	20W	2070	3000K	180x55	160	1,4 kg.
IDS-504-020-840	20W	2200	4000K	180x55	160	1,4 kg.
IDS-504-020-865	20W	2280	6500K	180x55	160	1,4 kg.



FEATURES

Mechanical

Body: Aluminium
 Finish: Electrostatic powder painted
 Installation: Ceiling recessed
 Diffuser: Opal plexiglass diffuser

Electrical

Driver: LED driver with external connection
 Light source: SMD LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 Pf>0.90
 Operating Temperature: -20 / +50


Options

RAL selection
 CRI>90
 Microprismatic diffuser - UGR<19
 DALI
 0-10V / 1-10V
 Casambi
 Emergency kit / CBS connection
 GST connector

Optical

BeaBeam angle: 120 degrees
 UGR: <21
 CRI>80
 McAdams Step<3

Specifications




Photometric Data

CCT Values



Technical Drawing



Art. No.	Watt	Lumen	CCT	Dimensions (QxH)mm.	Cut-out (mm.)	Weight (kg.)
IDS-505-025-830	25W	2500	3000K	200x55	175	1,6 kg.
IDS-505-025-840	25W	2550	4000K	200x55	175	1,6 kg.
IDS-505-025-865	25W	2600	6500K	200x55	175	1,6 kg.



FEATURES

Mechanical

Body: Aluminium
 Finish: Electrostatic powder painted
 Installation: Ceiling recessed
 Diffuser: Opal plexiglass diffuser

Electrical

Driver: LED driver with external connection
 Light source: SMD LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 Pf>0.90
 Operating Temperature: -20 / +50


Options

RAL selection
 CRI>90
 Microprismatic diffuser - UGR<19
 DALI
 0-10V / 1-10V
 Casambi
 Emergency kit / CBS connection
 GST connector

Optical

Beam angle: 120 degrees
 UGR: <21
 CRI>80
 McAdams Step<3

Specifications




Photometric Data

CCT Values



Technical Drawing



Art. No.	Watt	Lumen	CCT	Dimensions (QxH)mm.	Cut-out (mm.)	Weight (kg.)
IDS-506-030-830	30W	3060	3000K	240x55	210	2,0 kg.
IDS-506-030-840	30W	3150	4000K	240x55	210	2,0 kg.
IDS-506-030-865	30W	3210	6500K	240x55	210	2,0 kg.



FEATURES

Mechanical

Body: Aluminium
 Finish: Electrostatic powder painted
 Installation: Ceiling surface mounted
 Diffuser: Opal plexiglass diffuser

Electrical

Driver: LED driver inside body.
 Light source: SMD LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 P_r>0.90
 Operating Temperature: -20 / +50


Options

RAL selection
 CRI>90
 Microprismatic diffuser - UGR<19
 DALI
 0-10V / 1-10V
 Casambi
 Emergency kit / CBS connection

Optical

Beam angle: 120 degrees
 UGR: <21
 CRI>80
 McAdams Step<3

Specifications




Photometric Data

CCT Values



Technical Drawing

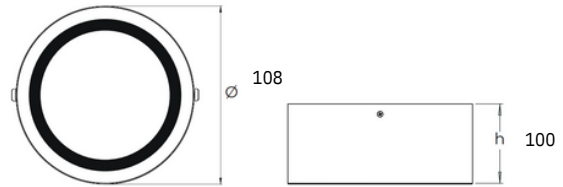

Art. No.	Watt	Lumen	CCT	Dimensions (QxH)mm.	Cut-out (mm.)	Weight (kg.)
IDS-507-008-830	8W	810	3000K	108x100	N/A	1,0 kg.
IDS-507-008-840	8W	840	4000K	108x100	N/A	1,0 kg.
IDS-507-008-865	8W	900	6500K	108x100	N/A	1,0 kg.

ATLAS-S II

IDS-508 Categories: [Downlights](#), [Interior](#)

NERA
LIGHT



FEATURES

Mechanical

Body: Aluminium
Finish: Electrostatic powder painted
Installation: Ceiling surface mounted
Diffuser: Opal plexiglass diffuser

Electrical

Driver: LED driver inside the body
Light source: SMD LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pfc>0.90
Operating Temperature: -20 / +50


Options

RAL selection
CRI>90
Microprismatic diffuser - UGR<19
DALI
0-10V / 1-10V
Casambi
Emergency kit / CBS connection

Optical

Beam angle: 120 degrees
UGR: <21
CRI>80
McAdams Step<3

Specifications




Photometric Data

CCT Values



Technical Drawing

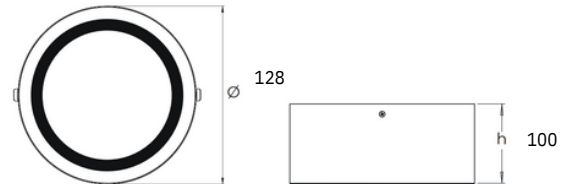

Art. No.	Watt	Lumen	CCT	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
IDS-508-012-830	12W	1150	3000K	128x100	N/A	1,4 kg.
IDS-508-012-840	12W	1200	4000K	128x100	N/A	1,4 kg.
IDS-508-012-865	12W	1280	6500K	128x100	N/A	1,4 kg.

ATLAS-S III

IDS-509 Categories: [Downlights](#), [Interior](#)

NERA
LIGHT



FEATURES

Mechanical

Body: Aluminium
Finish: Electrostatic powder painted
Installation: Ceiling surface mounted
Diffuser: Opal plexiglass diffuser


Electrical

Driver: LED driver inside the body
Light source: SMD LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf: 0.90
Operating Temperature: -20 / +50

Options

RAL selection
CRI > 90
Microprismatic diffuser - UGR < 19
DALI
0-10V / 1-10V
Casambi
Emergency kit / CBS connection
Optical
Beam angle: 120 degrees
UGR: < 21
CRI > 80
McAdams Step < 3

Specifications




Photometric Data

CCT Values



Technical Drawing

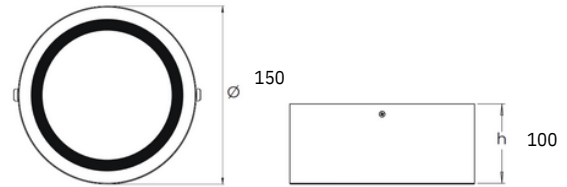

Art. No.	Watt	Lumen	CCT	Dimensions (QxH)mm.	Cut-out (mm.)	Weight (kg.)
IDS-509-015-830	15W	1500	3000K	150x100	N/A	1,6 kg.
IDS-509-015-840	15W	1620	4000K	150x100	N/A	1,6 kg.
IDS-509-015-865	15W	1690	6500K	150x100	N/A	1,6 kg.

ATLAS-S VI

IDS-512 Categories: [Downlights](#), [Interior](#)

NERA
LIGHT



FEATURES

Mechanical

Body: Aluminium
Finish: Electrostatic powder painted
Installation: Ceiling surface mounted
Diffuser: Opal plexiglass diffuser

Electrical

Driver: LED driver inside the body
Light source: SMD LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pfc>0,90
Operating Temperature: -20 / +50


Options

RAL selection
CRI>90
Microprismatic diffuser - UGR<19
DALI
0-10V / 1-10V
Casambi
Emergency kit / CBS connection

Optical

Beam angle: 120 degrees
UGR: <21
CRI>80
McAdams Step<3

Specifications




Photometric Data

CCT Values



Technical Drawing

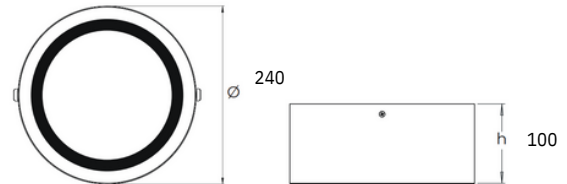

Art. No.	Watt	Lumen	CCT	Dimensions (QxH)mm.	Cut-out (mm.)	Weight (kg.)
IDS-512-030-830	30W	3060	3000K	240x100	N/A	2,4 kg.
IDS-512-030-840	30W	3150	4000K	240x100	N/A	2,4 kg.
IDS-512-030-865	30W	3210	6500K	240x100	N/A	2,4 kg.

ATLAS-SIV

IDS-510 Categories: [Downlights](#), [Interior](#)

NERA
LIGHT



FEATURES

Mechanical

Body: Aluminium
Finish: Electrostatic powder painted
Installation: Ceiling surface mounted
Diffuser: Opal plexiglass diffuser

Electrical

DDriver: LED driver inside the body
Light source: SMD LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pfc: 0.90
Operating Temperature: -20 / +50


Options

RRAL selection
CRI>90
Microprismatic diffuser - UGR<19
DALI
0-10V / 1-10V
Casambi
Emergency kit / CBS connection

Optical

Beam angle: 120 degrees
UGR: <21
CRI>80
McAdams Step<3

Specifications




Photometric Data

CCT Values



Technical Drawing

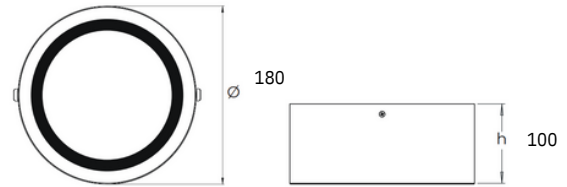

<i>Art. No.</i>	<i>Watt</i>	<i>Lumen</i>	<i>CCT</i>	<i>Dimensions (QxH)mm.</i>	<i>Cut-out (mm.)</i>	<i>Weight (kg.)</i>
IDS-510-020-830	20W	2070	3000K	180x100	N/A	1,8 kg.
IDS-510-020-840	20W	2200	4000K	180x100	N/A	1,8 kg.
IDS-510-020-865	20W	2280	6500K	180x100	N/A	1,8 kg.

Metis

Downlight Series





FEATURES

Mechanical

Body: Aluminium
 Finish: Electrostatic powder painted
 Installation: Ceiling recessed
 Diffuser: Opal plexiglass diffuser

Options

RAL selection
 CRI>90
 Microprismatic diffuser - UGR<19
 DALI
 0-10V / 1-10V
 Casambi
 Emergency kit / CBS connection
 GST connector


Electrical

Driver: LED driver with external connection
 Light source: SMD LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 Pfs>0.90
 Operating Temperature: -20 / +50

Optical

Beam angle: 120 degrees
 UGR: <21
 CRI>80
 McAdams Step<3

Specifications




Photometric Data

CCT Values



2700K 3000K 4000K 5000K 6500K

Technical Drawing



Art. No.	Watt	Lumen	CCT	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
IDS-531-008-830	8W	810	3000K	108x55	85	0,6 kg.
IDS-531-008-840	8W	840	4000K	108x55	85	0,6 kg.
IDS-531-008-865	8W	900	6500K	108x55	85	0,6 kg.

METIS II

IDS-532 Categories: [Downlights](#), [Interior](#)

NERA
LIGHT



FEATURES

Mechanical

Body: Aluminium
Finish: Electrostatic powder painted
Installation: Ceiling recessed
Diffuser: Opal plexiglass diffuser

Optical

Beam angle: 120 degrees
UGR: <21
CRI>80
McAdams Step<3


Electrical

Driver: LED driver with external connection
Light source: SMD LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50

Options

RRAL selection
CRI>90
Microprismatic diffuser - UGR<19
DALI
0-10V / 1-10V
Casambi
Emergency kit / CBS connection
GST connector

Specifications




Photometric Data

CCT Values



Technical Drawing



<i>Art. No.</i>	<i>Watt</i>	<i>Lumen</i>	<i>CCT</i>	<i>Dimensions (QxH) mm.</i>	<i>Cut-out (mm.)</i>	<i>Weight (kg.)</i>
IDS-532-012-830	12W	1150	3000K	128x55	105	0,9 kg.
IDS-532-012-840	12W	1200	4000K	128x55	105	0,9 kg.
IDS-532-012-865	12W	1280	6500K	128x55	105	0,9 kg.

METIS III

IDS-533 Categories: [Downlights](#), [Interior](#)

NERA

LIGHT



FEATURES

Mechanical

Body: Aluminium
Finish: Electrostatic powder painted
Installation: Ceiling recessed
Diffuser: Opal plexiglass diffuser

Optical

Beam angle: 120 degrees
UGR: <21
CRI>80
McAdams Step<3


Electrical

Driver: LED driver with external connection
Light source: SMD LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pfc0.90
Operating Temperature: -20 / +50

Options

RAL selection
CRI>90
Microprismatic diffuser - UGR<19
DALI
0-10V / 1-10V
Casambi
Emergency kit / CBS connection
GST connector

Specifications




Photometric Data

CCT Values



Technical Drawing



Art. No.	Watt	Lumen	CCT	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
IDS-533-015-830	15W	1500	3000K	150x55	130	1,2 kg.
IDS-533-015-840	15W	1620	4000K	150x55	130	1,2 kg.
IDS-533-015-865	15W	1690	6500K	150x55	130	1,2 kg.

METIS IV

IDS-534 Categories: [Downlights](#), [Interior](#)

NERA

LIGHT



FEATURES

Mechanical

Body: Aluminium
Finish: Electrostatic powder painted
Installation: Ceiling recessed
Diffuser: Opal plexiglass diffuser

Optical

Beam angle: 120 degrees
UGR: <21
CRI>80
McAdams Step<3


Electrical

Driver: LED driver with external connection
Light source: SMD LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50

Options

RAL selection
CRI>90
Microprismatic diffuser - UGR<19
DALI
0-10V / 1-10V
Casambi
Emergency kit / CBS connection
GST connector

Specifications




Photometric Data

CCT Values



Technical Drawing



Art. No.	Watt	Lumen	CCT	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
IDS-534-020-830	20W	2070	3000K	180x55	160	1,4 kg.
IDS-534-020-830	20W	2200	4000K	180x55	160	1,4 kg.
IDS-534-020-830	20W	2280	6500K	180x55	160	1,4 kg.



FEATURES

Mechanical

Body: Aluminium
 Finish: Electrostatic powder painted
 Installation: Ceiling recessed
 Diffuser: Opal plexiglass diffuser

Optical

Beam angle: 120 degrees
 UGR: <21
 CRI>80
 McAdams Step<3


Electrical

Driver: LED driver with external connection
 Light source: SMD LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 Pf>0.90
 Operating Temperature: -20 / +50

Options


RAL selection
 CRI>90
 Microprismatic diffuser - UGR<19
 DALI
 0-10V / 1-10V
 Casambi
 Emergency kit / CBS connection
 CST connector

Specifications




Photometric Data

CCT Values



Technical Drawing



Art. No.	Watt	Lumen	CCT	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
IDS-535-025-830	25W	2500	3000K	200x55	175	1,6 kg.
IDS-535-025-840	25W	2550	4000K	200x55	175	1,6 kg.
IDS-535-025-865	25W	2600	6500K	200x55	175	1,6 kg.



FEATURES

Mechanical

Body: Aluminium
 Finish: Electrostatic powder painted
 Installation: Ceiling recessed
 Diffuser: Opal plexiglass diffuser

Optical

Beam angle: 120 degrees
 UGR: <21
 CRI>80
 McAdams Step<3


Electrical

Driver: LED driver with external connection
 Light source: SMD LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 Pf>0.90
 Operating Temperature: -20 / +50

Options

RAL selection
 CRI>90
 Microprismatic diffuser - UGR<19
 DALI
 0-10V / 1-10V
 Casambi
 Emergency kit / CBS connection
 GST connector

Specifications




Photometric Data

CTT Values



Technical Drawing



<i>Art. No.</i>	<i>Watt</i>	<i>Lumen</i>	<i>CCT</i>	<i>Dimensions (QxH) mm.</i>	<i>Cut-out (mm.)</i>	<i>Weight (kg.)</i>
IDS-536-030-830	30W	3060	3000K	240x55	210	2,0 kg.
IDS-536-030-840	30W	3150	4000K	240x55	210	2,0 kg.
IDS-536-030-865	30W	3210	6500K	240x55	210	2,0 kg.