



Myra

Trimless Series



MYRA-T I

SKU: ISS-454 Categories: [Interior](#), [Trimless Series](#)



FEATURES

Mechanical

Body: Aluminium
Finish: Electrostatic powder painted
Installation: Trimless recessed mounted
Diffuser: Transparent safety glass
Optics: Aluminium reflector

Electrical

Driver: LED driver with external connection
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pfc: 0.90
Operating Temperature: -20 / +50

Options

RAL selection
CRI>90
CRI>97
DALI
0-10V / 1-10V
Casambi
Emergency kit /
CBS connection
GST connector


Optical

Beam angle: 15-30-45 degrees
UGR: <21
CRI>80
McAdams Step<3

Specifications




Photometric Data

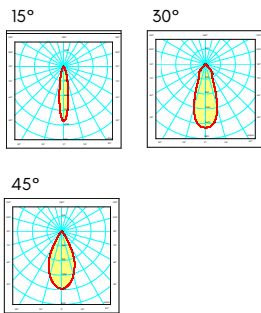

CCT Values



Technical Drawing

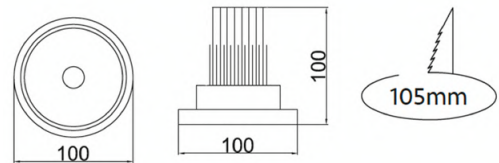

Art. No.	Watt	Lumen	CCT	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-454-008-827	8W	850	2700K	100x100	105	0,4 kg.
ISS-454-008-830	8W	1000	3000K	100x100	105	0,4 kg.
ISS-454-008-840	8W	1130	4000K	100x100	105	0,4 kg.
ISS-454-008-865	8W	1280	6500K	100x100	105	0,4 kg.

MYRA-T II

SKU: ISS-455 Categories: [Interior](#), [Trimless Series](#)



FEATURES

Mechanical

Body: Aluminium
 Finish: Electrostatic powder painted
 Installation: Trimless recessed mounted
 Diffuser: Transparent safety glass
 Optics: Aluminium reflector

Electrical

Driver: LED driver with external connection
 Light source: COB LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 Pf>0.90
 Operating Temperature: -20 / +50


Options

RAL selection
 CRI>90
 CRI>97
 DALI
 0-10V / 1-10V
 Casambi
 Emergency kit /
 CBS connection
 GST connector


Optical

Beam angle: 15-30-45 degrees
 UGR: <21
 CRI>80
 McAdams Step<3

Specifications




Photometric Data

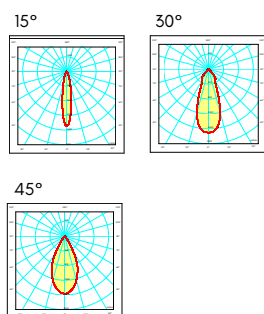

CCT Values



Technical Drawing

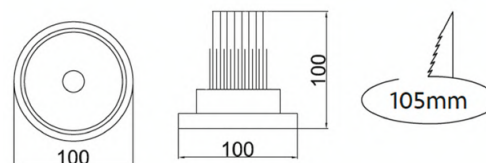

Art. No.	Watt	Lumen	CCT	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-455-208-827	2x8W	1700	2700K	100x100	105	0,4 kg.
ISS-455-208-830	2x8W	2000	3000K	100x100	105	0,4 kg.
ISS-455-208-840	2x8W	2260	4000K	100x100	105	0,4 kg.
ISS-455-208-865	2x8W	2560	6500K	100x100	105	0,4 kg.

MYRA-TA

SKU: ISS-456 Categories: [Interior](#), [Trimless Series](#)



FEATURES

Mechanical

Body: Aluminium
Finish: Electrostatic powder painted
Installation: Trimless recessed mounted
Optics: Aluminium reflector

Electrical

Driver: LED driver with external connection
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
P_f>0,90
Operating Temperature: -20 / +50

Options

RAL selection
CRI>90
CRI>97
DALI
0-10V / 1-10V
Casambi
Emergency kit /
CBS connection
GST connector


Optical

Beam angle: 15-30-45 degrees
Light Effect: Asymmetrical
UGR: <21
CRI>80
McAdams Step<3


Specifications




Photometric Data

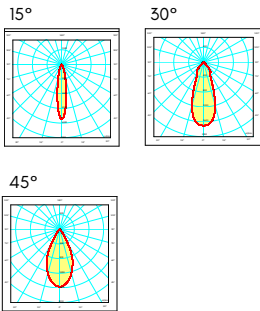

CCT Values



Technical Drawing

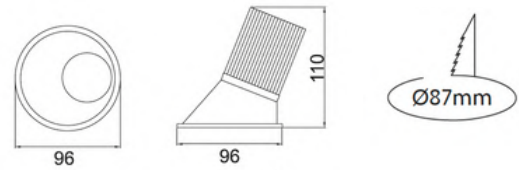

Art. No.	Watt	Lumen	CCT	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-456-008-827	8W	720	2700K	96x100	87	0,4 kg.
ISS-456-008-830	8W	815	3000K	96x100	87	0,4 kg.
ISS-456-008-840	8W	900	4000K	96x100	87	0,4 kg.
ISS-456-008-865	8W	1050	6500K	96x100	87	0,4 kg.

MYRA-TB

SKU: ISS-457 Categories: [Interior](#), [Trimless Series](#)



FEATURES

Mechanical

Body: Aluminium
 Finish: Electrostatic powder painted
 Installation: Trimless recessed mounted
 Diffuser: Transparent safety glass
 Optics: Aluminium reflector
 Louvre: Dark or gold louvre options

Electrical

Driver: LED driver with external connection
 Light source: COB LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 Pfc: 0.90
 Operating Temperature: -20 / +50

Options

RAL selection
 CRI>90
 CRI>97
 DALI
 0-10V / 1-10V
 Casambi
 Emergency kit /
 CBS connection
 GST connector


Optical

Beam angle: 15-30-45 degrees
 UGR: <19
 CRI>80
 McAdams Step<3

Specifications




Photometric Data

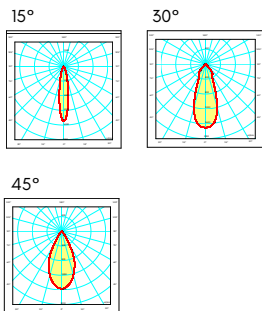

CCT Values



Technical Drawing

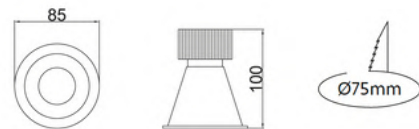

Art. No.	Watt	Lumen	CCT	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-457-008-827	8W	850	2700K	85x100	75	0,4 kg.
ISS-457-008-830	8W	1000	3000K	85x100	75	0,4 kg.
ISS-457-008-840	8W	1130	4000K	85x100	75	0,4 kg.
ISS-457-008-865	8W	1280	6500K	85x100	75	0,4 kg.



Cronus

Trimless Series



Cronus-C

SKU: ISS-450 Categories: [Interior](#), [Trimless Series](#)



FEATURES

Mechanical

Body: Aluminium
 Finish: Electrostatic powder painted
 Installation: Trimless recessed mounted
 Diffuser: Transparent safety glass
 Optics: Aluminium reflector

Electrical

Driver: LED driver with external connection
 Light source: COB LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 Pfc: >0.90
 Operating Temperature: -20 / +50


Options

RAL selection
 CRI>90
 CRI>97
 DALI
 0-10V / 1-10V
 Casambi
 Emergency kit /
 CBS connection
 GST connector


Optical

Beam angle: 15-30-45 degrees
 UGR: <19
 CRI>80
 McAdams Step<3

Specifications




Photometric Data

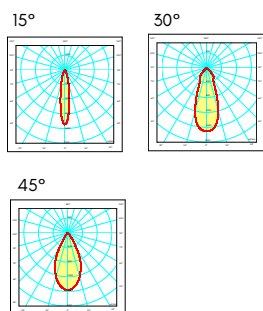

CCT Values




Technical Drawing

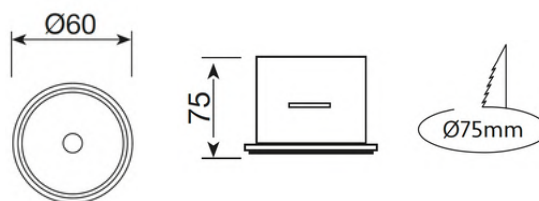

Art. No.	Watt	Lumen	CCT	Dimensions (QxH)mm.	Cut-out (mm.)	Weight (kg.)
ISS-450-008-827	8W	850	2700K	60x75	75	0,4 kg.
ISS-450-008-830	8W	1000	3000K	60x75	75	0,4 kg.
ISS-450-008-840	8W	1130	4000K	60x75	75	0,4 kg.
ISS-450-008-865	8W	1280	6500K	60x75	75	0,4 kg.

Cronus-S

SKU: ISS-451 Categories: [Interior](#), [Trimless Series](#)

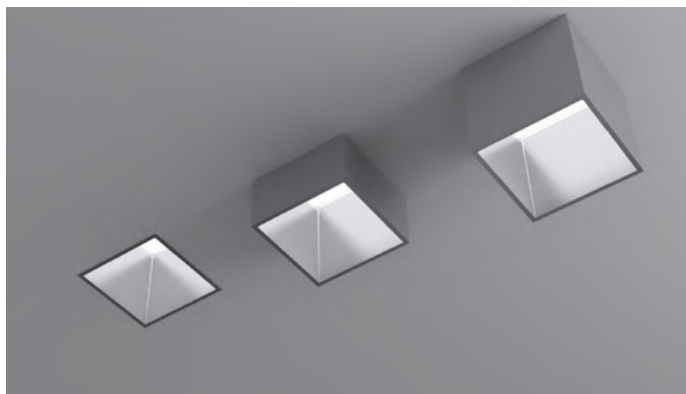

FEATURES

Mechanical

Body: Aluminium
 Finish: Electrostatic powder painted
 Installation: Trimless recessed mounted
 Diffuser: Transparent safety glass
 Optics: Aluminium reflector

Electrical

Driver: LED driver with external connection
 Light source: COB LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 P_f>0.90
 Operating Temperature: -20 / +50

Options

Semi-recessed or surface mounting options
 RAL selection
 CRI>90
 CRI>97
 DALI
 0-10V / 1-10V
 Casambi
 Emergency kit / CBS connection
 GST connector


Optical

Beam angle: 15-30-45 degrees
 UGR: <19
 CRI>80
 McAdams Step<3

Specifications



Photometric Data

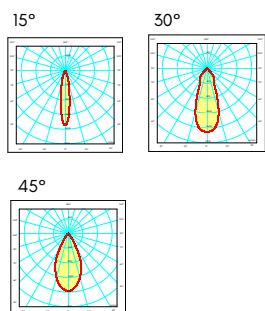

CCT Values



Technical Drawing



Art. No.	Watt	Lumen	CCT	Dimensions (QxH)mm.	Cut-out (mm.)	Weight (kg.)
ISS-451-008-827	8W	850	2700K	75x75	75	0,4 kg.
ISS-451-008-830	8W	1000	3000K	75x75	75	0,4 kg.
ISS-451-008-840	8W	1130	4000K	75x75	75	0,4 kg.
ISS-451-008-865	8W	1280	6500K	75x75	75	0,4 kg.



Paris

Trimless Series



PARIS-T I

SKU: ISS-452 Categories: [Interior](#), [Trimless](#)



FEATURES

Mechanical

Body: Aluminium
Finish: Electrostatic powder painted
Installation: Trimless recessed mounted
Diffuser: Transparent safety glass
Optics: Aluminium reflector

Electrical

Driver: LED driver with external connection
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
P_f>0.90
Operating Temperature: -20 / +50


Options

RAL selection
CRI>90
CRI<97
DALI
0-10V / 1-10V
Casambi
Emergency kit / CBS connection


Optical

Beam angle: 15-30-45 degrees
UGR: <21
CRI>80
McAdams Step<3


Specifications




Photometric Data

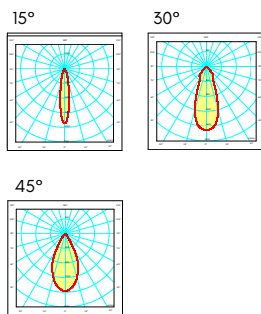

CCT Values



Technical Drawing

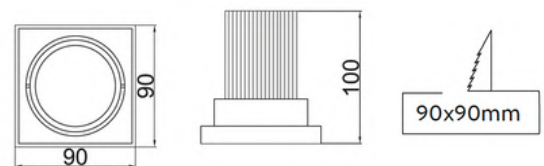

Art. No.	Watt	Lumen	CCT	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-452-008-827	8W	850	2700K	90x90x100	90x90	0,7 kg.
ISS-452-008-830	8W	1000	3000K	90x90x100	90x90	0,7 kg.
ISS-452-008-840	8W	1130	4000K	90x90x100	90x90	0,7 kg.
ISS-452-008-865	8W	1280	6500K	90x90x100	90x90	0,7 kg.

PARIS-T II

SKU: ISS-453 Categories: [Interior](#), [Trimless](#)



FEATURES

Mechanical

Body: Aluminium
Finish: Electrostatic powder painted
Installation: Trimless recessed mounted
Diffuser: Transparent safety glass
Optics: Aluminium reflector

Electrical

Driver: LED driver with external connection
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pfc: 0.90
Operating Temperature: -20 / +50


Options

RAL selection
CRI>90
CRI<97
DALI
0-10V / 1-10V
Casambi
Emergency kit /
CBS connection


Optical

Beam angle: 15-30-45 degrees
UGR: <21
CRI>80
McAdams Step<3


Specifications




Photometric Data

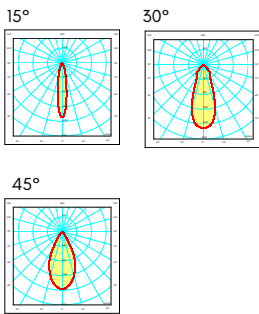

CCT Values



Technical Drawing

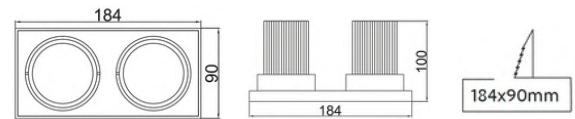

Art. No.	Watt	Lumen	CCT	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-453-208-827	2x8W	1700	2700K	184x90x100	184x90	1,2 kg.
ISS-453-208-830	2x8W	2000	3000K	184x90x100	184x90	1,2 kg.
ISS-453-208-840	2x8W	2260	4000K	184x90x100	184x90	1,2 kg.
ISS-453-208-865	2x8W	2560	6500K	184x90x100	184x90	1,2 kg.



Teos

Trimless Series



TEOS-T I

SKU: ISS-458 Categories: [Interior](#), [Trimless](#)



FEATURES

Mechanical

Body: Aluminium
Finish: Electrostatic powder painted
Installation: Trimless recessed mounted
Diffuser: Transparent safety glass
Optics: Aluminum reflector

Electrical

Driver: LED driver with external connection
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
P_f>0.90
Operating Temperature: -20 / +50


Options

RAL selection
CRI>90
CRI>97
DALI
0-10V / 1-10V
Casambi
Emergency kit /
CBS connection
GST connector


Optical

Beam angle: 15-30-45 degrees
UGR: <21
CRI>80
McAdams Step<3


Specifications




Photometric Data

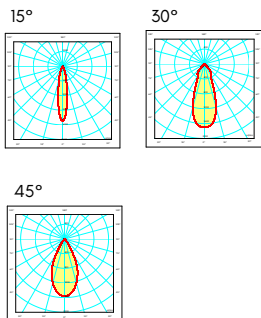

CCT Values



Technical Drawing

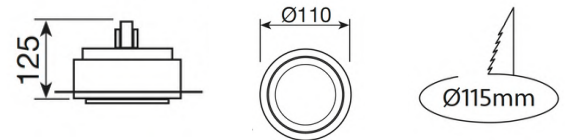

Art. No.	Watt	Lumen	CCT	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-458-020-827	20W	2200	2700K	110x125	115	0,9 kg.
ISS-458-020-830	20W	2380	3000K	110x125	115	0,9 kg.
ISS-458-020-840	20W	2475	4000K	110x125	115	0,9 kg.
ISS-458-020-865	20W	2600	6500K	110x125	115	0,9 kg.

TEOS-T II

SKU: ISS-459 Categories: [Interior](#), [Trimless](#)



FEATURES

Mechanical

Body: Aluminium
Finish: Electrostatic powder painted
Installation: Trimless recessed mounted
Diffuser: Transparent safety glass
Optics: Aluminum reflector

Electrical

Driver: LED driver with external connection
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
P_f>0.90
Operating Temperature: -20 / +50


Options

RAL selection
CRI>90
CRI>97
DALI
0-10V / 1-10V
Casambi
Emergency kit /
CBS connection
GST connector


Optical

Beam angle: 15-30-45 degrees
UGR: <21
CRI>80
McAdams Step<3

Specifications




Photometric Data

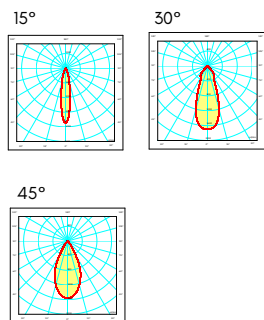

CCT Values



Technical Drawing

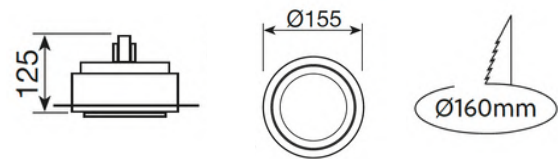

Art. No.	Watt	Lumen	CCT	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-459-030-827	30W	3350	2700K	155x125	160	1,3 kg.
ISS-459-030-830	30W	3520	3000K	155x125	160	1,3 kg.
ISS-459-030-840	30W	3650	4000K	155x125	160	1,3 kg.
ISS-459-030-865	30W	3800	6500K	155x125	160	1,3 kg.